



Sealed Lead Acid Rechargeable Battery

General Application

12VC18 is a general purpose battery with 3~5 years in standby service or more than 400 cycles at 50% depth of discharge in cycle service.

Unit Specification

• NOMINAL VOLTAGE	: 12 V
• NOMINAL CAPACITY(20 hr)	: 18.0 Ah
• DIMENSIONS	
TOTAL HEIGHT	: 167 mm (6.58 inches)
CONTAINER HEIGHT	: 167 mm (6.58 inches)
LENGTH	: 181 mm (7.13 inches)
WIDTH	: 76 mm (2.99 inches)
• NET WEIGHT(UNIT)	: APPROX 5.60 Kg (12.35 lbs)
• CONTAINER MATERIAL	: UL94HB ABS
	: UL94V-0 ABS
• INTERNAL RESISTANCE(25°C , 77 °F)	: ~13m Ω
• DISCHARGE CAPACITY UNDER DIFFERENT TEMPERATURES	
40°C	: ~102%
25°C	: ~100%
0 °C	: ~85%

Characteristics


• CAPACITY 25 °C / 77 °F	
20 hr @ 0.9 A	: 18.0 Ah
5 hr @ 2.88 A	: 14.4 Ah
1 hr @ 10.8 A	: 10.8 Ah
1 C @ 18 A	: 9.0 Ah
• CHARGING VOLTAGE (25°C , 77 °F)	
STANDBY USE	: 13.65V \pm 0.15V
CYCLE USE	: 14.7V \pm 0.3V
• MAX DISCHARGE CURRENT	: 300 A (5 sec)
• MAX CHARGING CURRENT	: 5.4 A
• SELF-DISCHARGE RESIDUAL CAPACITY(25°C , 77 °F)	
AFTER 3 MONTHS	: ~90%
AFTER 6 MONTHS	: ~82%
AFTER 12 MONTHS	: ~70%

Packaging and Weights


- CASE LOT SIZE : 4Pcs
- NET WEIGHT(UNIT) : 5.60Kg (12.35lbs)
- GROSS WEIGHT(CASE SIZE) : 23.40Kg (51.59lbs)

12VC18 12V18.0Ah


Discharge Current vs Time

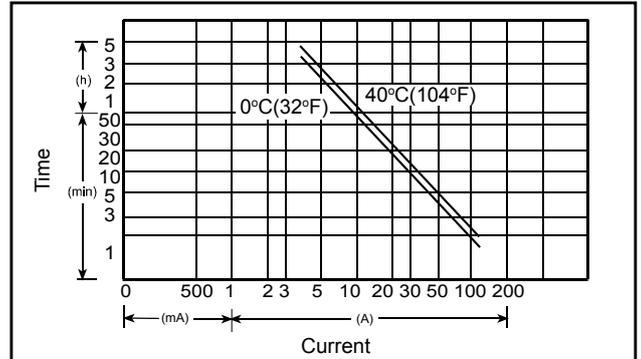

Discharge Characteristics @25 °C (77 °F)

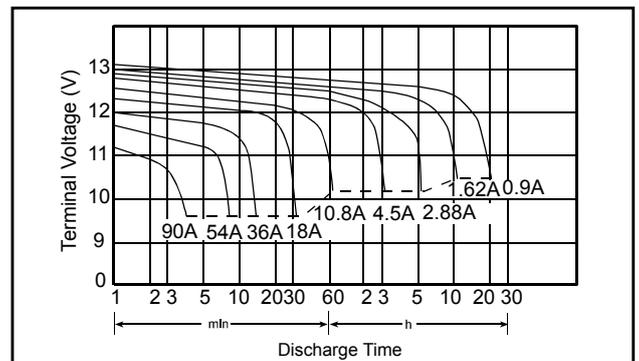

Dimensions

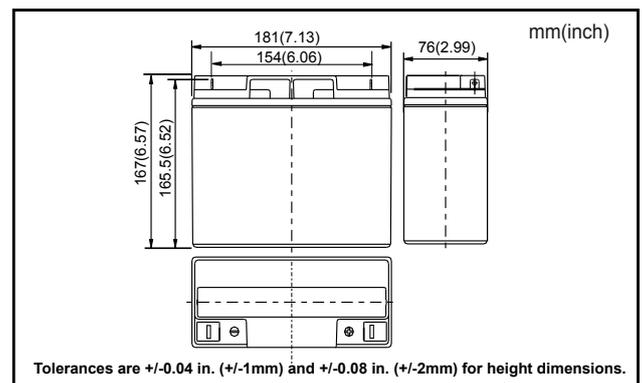

Terminal

