

# LED FIXTURE

SSL Series



## LED Canopy SSL-CP3

Ultra-thin design, 120-347V auto-sensing driver  
Multiple wattage and multiple kelvin selection



5-year limited warranty


Operating temperature range -40° C ~ +40° C



### Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Switchable CCT (30K/40K/50K), switchable wattage
- Die-cast aluminum with durable dark bronze coat finish
- Suitable for J-BOX mounting, and pendant mounting
- PC lens clear
- L70 @ 100,000 Hrs, CRI≥70, 150° beam angle
- IP 65, wet location rated

### Dimensional Drawing

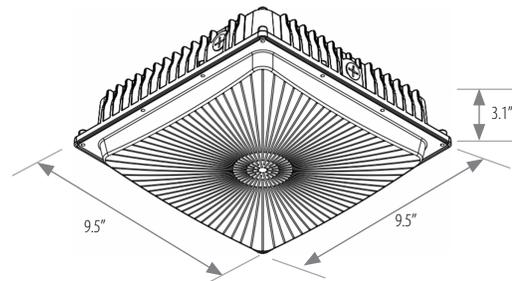

### Ordering Information Example: SSL-CP3/40W/MK/120-347V/D/DB

Family Name	Fixture Type	Type	CCT	Voltage	Dimmable	Finish	Options
SSL (Solid state lighting)	CP3 (LED canopy)	40W 60M (Max. 60W, multiple wattage)	MK (Multi kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze)	Microwave sensor

### Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3665315	Y	SSL-CP3/40W/MK/120-347V/D/DB	40	120-347	50,000	H150° x V150°	5200	30-40-50	70	9.5" x 9.5" x 3.1"	5
3680306	Y	SSL-CP3/60M/MW/MK/120-347V/D/DB	60-40-28	120-347	50,000	H150° x V150°	7800-5200-3640	30-40-50	70	9.5" x 9.5" x 3.1"	5
3660188	-	SSL-CP3/LV/12V/SENSOR									
3660189	-	SSL-CP3/LV/12V/CONTROLLER									