

Product data sheet

Specifications

SQUARE D

Green Premium™



Generator panel, QO, 1 phase, 18 spaces, 36 circuits, 30A main breaker, PoN, NEMA1, cover with door, UL

QOGP3P3036P

Main

Marketing Trade Name	QO
Product Type	Panel

Complementary

Tightening Torque	Cover 20 lb.in
Load Center Type	PoN Convertible Mains (breaker)
Rated Current	30 A
Max Short Circuit Current Rating	10 kA
Maximum Number Of Single Pole Circuits	36
Number Of Phases	1 phase
Voltage Rating	120/240 V AC
Ground Bar	Grounding bar (ordered separately)
Height	17.91 in (455 mm)
Width	14.25 in (362 mm)
Depth	3.74 in (95 mm)

Environment

Enclosure Rating	NEMA 1 indoor
Ambient Air Temperature For Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL listed

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.74 in (9.5 cm)
Package 1 Width	14.25 in (36.2 cm)
Package 1 Length	17.91 in (45.5 cm)
Package 1 Weight	20.50 lb(US) (9.299 kg)

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)


Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions

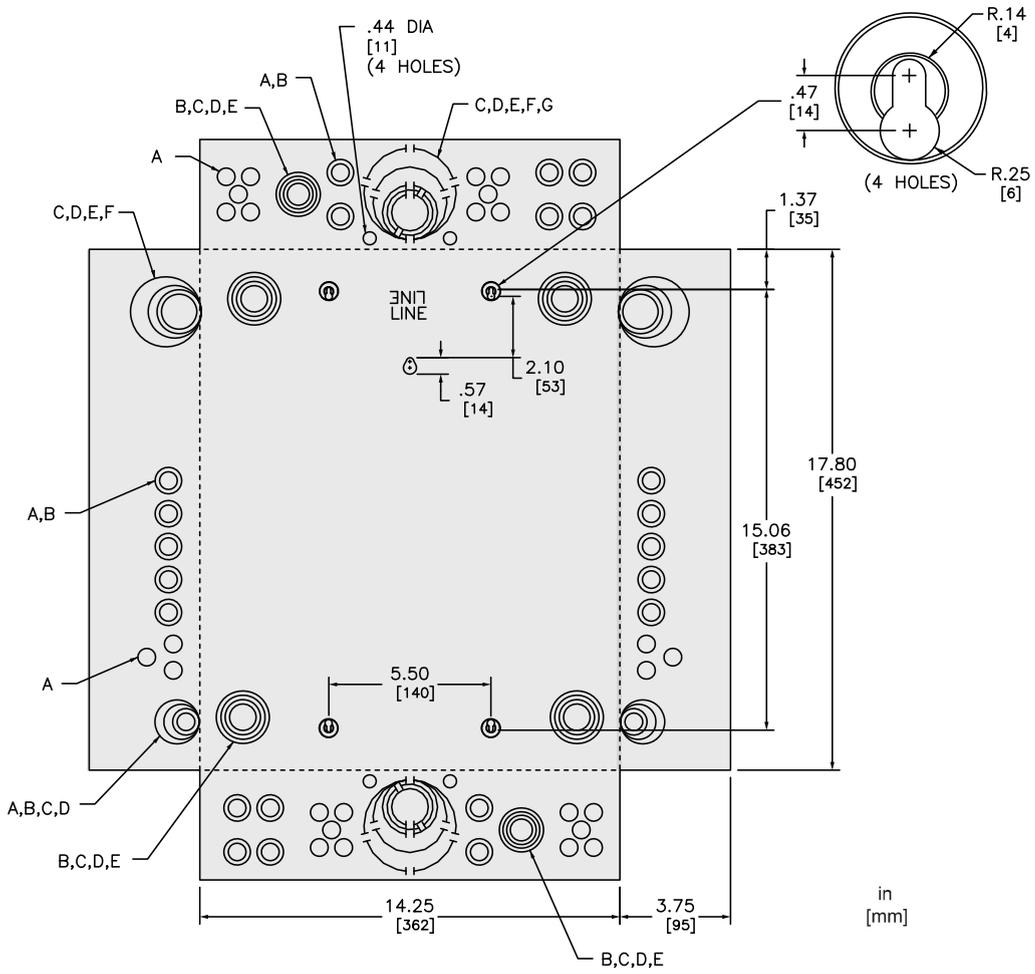

KNOCKOUTS DÉBOUCHURES							
SYMBOL SYMBOLE	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

Wiring diagram

